


Image not found or type unknown

JSC «Voltyre-Prom»
Russia, 404103, Volzhskiy, 7 Avtodoroga str., 25 A
Phone: (8443) 24-02-20
E-mail: voltyre@titancis.ru
Web site: voltyre-prom.ru

650/75R38 TITAN AG53V TL

Image not found or type unknown

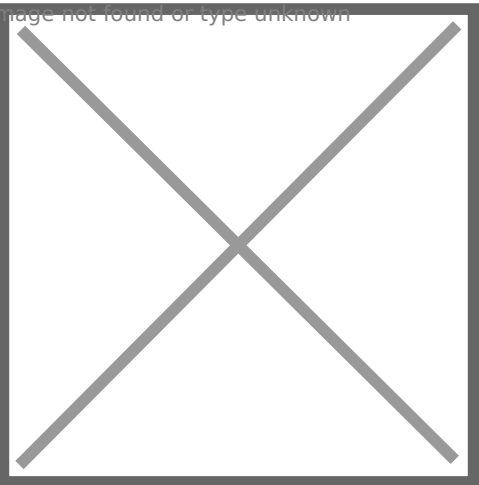

The reinforced tire structure and the ability to work on uneven, muddy, and hard surfaces. High traction and low rolling resistance increase overall productivity of the wheels.

Tire parameters:

Application
Brand
Overall diameter, mm
Profile width
Rim diameter, inh
Static RADIUS, mm
Load index
Maximum load, kgf
Pressure, kPa
Maximum speed, km/h
Rim
Model
Tread depth, mm
Standard size, mm
Unconditional guarantee

All the claims shall be mailed to:
404103, Volzhsky, 7 Avtodoroga, 25A, JSC Voltyre-Prom, or reported by phone +7(8443) 24-02-95
Please contact the Sales department to clarify the price and the terms of purchase.
Phones: +7(8443) 24-05-87 (sales department in Russia), +7(8443) 24-04-99 (Export)