
**JSC «Voltyre-Prom»**

Russia, 404103, Volzhskiy, 7 Avtodoroga str., 25 A

**Phone:** (8443) 24-02-20**E-mail:** [voltyre@titancis.ru](mailto:voltyre@titancis.ru)**Web site:** [voltyre-prom.ru](http://voltyre-prom.ru)

## 28x9-15NHS VOLTYRE HEAVY DT-121 TT

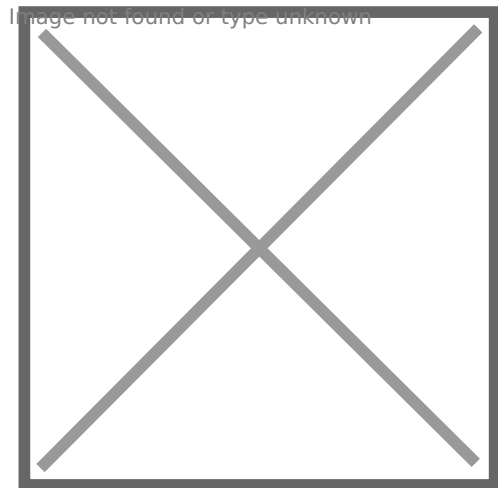

Pneumatic tubeless tire is designed for use on diesel forklifts with load capacity 3000 kg. The tread pattern is suitable for both the dry and wet road. It has additionally reinforced sidewalls.

Tire parameters:

Application
Brand
Overall diameter, mm
Profile width
Rim diameter, inh
Static RADIUS, mm
Load index
Maximum load, kgf
Pressure, kPa
Ply rating
Maximum speed, km/h
Rim
Model
Tread depth, mm
Tube
Flap

**All the claims shall be mailed to:**

404103, Volzhsky, 7 Avtodoroga, 25A, JSC Voltyre-Prom, or reported by phone +7(8443) 24-02-95

Please contact the Sales department to clarify the price and the terms of purchase.

Phones: +7(8443) 24-05-87 (sales department in Russia), +7(8443) 24-04-99 (Export)